


LUGALL®

WEB STRAP

WINCH-HOISTS

NEW!

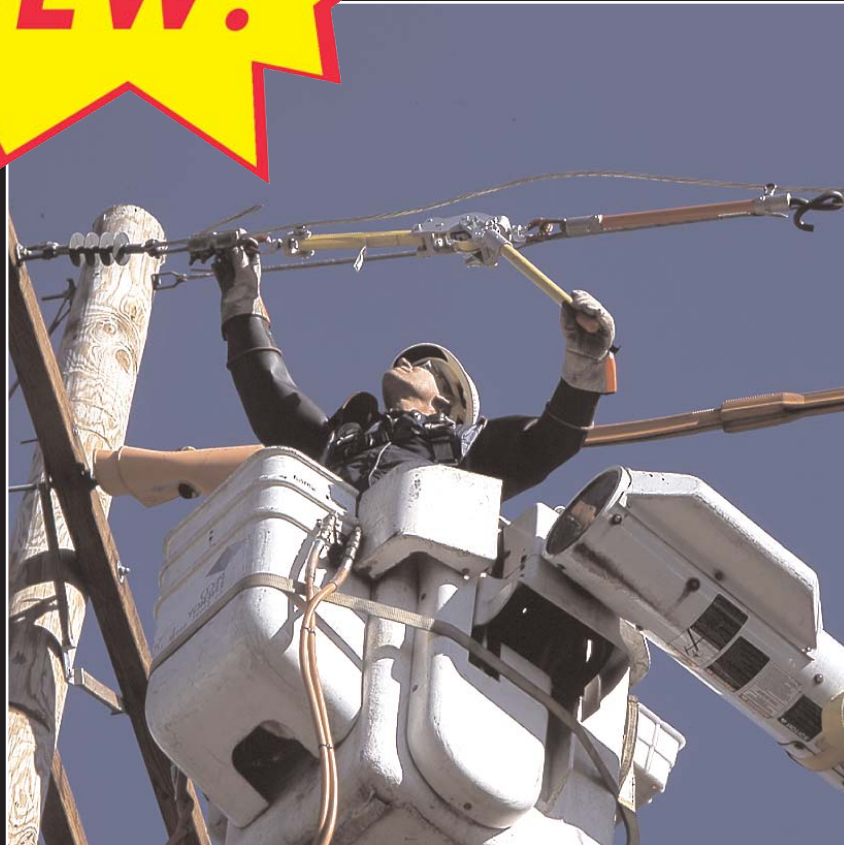

LUGALL®

HOOK UP WITH LUG-ALL.

QUALITY • DURABILITY • RELIABILITY

Made in U.S.A.

**EXCLUSIVE
STRESS LINK
OVERLOAD
WARNING**

NEW MODEL 30

Meet the newest edition to the LUG-ALL line of Web Strap Winch Hoists, the Model 30.

- Lightweight and strong small frame - 1 1/2 TON
- Convertible - changes quickly from a single to a double rigged capacity
- No extra parts to misplace
- Extended shafts with levers - easy operation even with gloves
- Exclusive web guide - keeps strap from twisting
- Wind up wheel - makes winding the strap back up quick and easy
- Open frame construction - allows for easier visual inspection
- Breakable stress link - snaps on overload warning the operator to back off the load
- Choice of hook styles - to meet application requirements and workplace standards
- Hot stick rings available

The Stress Link, next to the Overload Link, snaps when the hoist is seriously overloaded, warning the operator to back off the load before injury or damage.

Replace broken Stress Link IMMEDIATELY!!

The Overload Link has elongated holes which allows enough movement for the Stress Link to snap, while holding the handle socket assembly together.



Reversible fiberglass handle

Interlocking pawl system

Aluminum alloy frame

Web strap stores on double flanged drums

Extended shafts with levers - easy operation with gloves

Web Guide - this exclusive feature keeps the strap from twisting


Open construction for daily visual inspection

Nylon web strap

Used as Pulley Block when rigged double line

Forged steel latching hooks

MODEL NUMBER	SINGLE LINE CAPACITY LB/METRIC [†]	SINGLE LINE HOOK TO HOOK DISTANCE		DOUBLE LINE CAPACITY LB/METRIC [†]	DOUBLE LINE HOOK TO HOOK DISTANCE		TOTAL MAXIMUM PULLING DISTANCE		HANDLE LENGTH	WEIGHT
		MIN.	MAX.		MIN.	MAX.	SINGLE	DOUBLE		
1 1/2 TON CAPACITY										
30A LATCHING HOOKS	1500/682	1' 10"	9'	3000/1363	1' 10"	5' 1"	7'	3' 3"	2' 6"	10 lb.
30B HOT STICK RINGS & LATCHING HOOKS	1500/682	1' 10"	9'	3000/1363	1' 10"	5' 1"	7'	3' 3"	2' 6"	10.25 lb.
30U GATE TYPE HOOKS	1500/682	2'	9' 2"	3000/1363	2'	5' 3"	7'	3' 3"	2' 6"	10.25 lb.
30UB GATE TYPE HOOKS & HOT STICK RINGS	1500/682	2'	9' 2"	3000/1363	2'	5' 3"	7'	3' 3"	2' 6"	10.75 lb.
30HB HOT STICK RINGS & HOOK LATCHES	1500/682	2'	9' 2"	3000/1363	2'	5' 3"	7'	3' 3"	2' 6"	10.75 lb.
30PS CLEVIS JAWS & SCREW PINS	1500/682	1' 10"	9'	3000/1363	1' 10"	5' 1"	7'	3' 3"	2' 6"	11 lb.

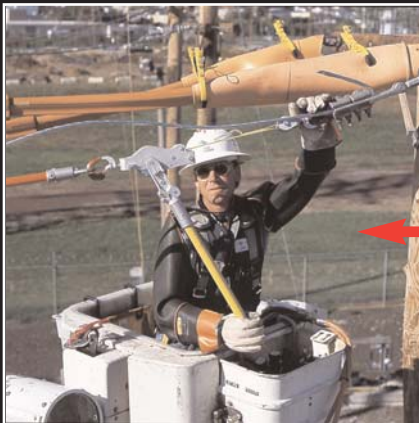

The model 30 can go from a single rigged to a double rigged capacity quickly and easily with NO extra parts to misplace.

← SINGLE
DOUBLE →

NOTE: Hoist must be double rigged to reach its full capacity



LUG-ALL®

Morgantown Business Park
604 Hemlock Road
Morgantown, PA 19543
Tel: 610-286-9884
Fax: 610-286-9661
www.lug-all.com
sales@lug-all.com



For inquiries, call us at:
1-877-658-4255
TOLL-FREE