

MODEL 40 WEB STRAP HOISTS


2-TON LIGHTWEIGHT FRAME

MODEL 40

**STARTS AT
12.5 POUNDS**



***Model 40-CA**

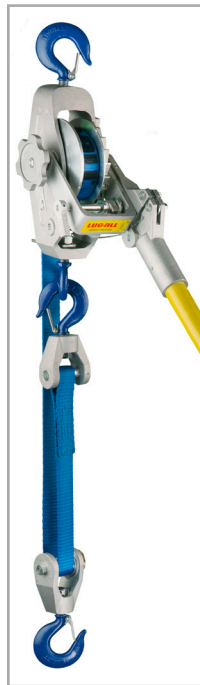

***Model 40-A**

Lug-All understands the importance of smaller and lighter tools in the electrical utility industry. That's why we designed the lightest 2-Ton web strap hoist in the market—the Lug-All Model 40. This line of hoists gives you the same features found in our Model 4 hoists, but with a smaller and lighter frame.



FIVE HOOK STYLES

MODEL LETTER	DESCRIPTION
A	Standard Latching Hooks
B	Hot-Stick Rings and Latching Hooks
U	Gate Type Hooks
UB	Gate Type Hooks and Hot-Stick Rings
HB	Hook Latches and Hot-Stick Rings

MODEL	CAPACITY (Tons)	SINGLE PULL DISTANCE (Feet-Inches)		CAPACITY (Tons)	DOUBLE PULL DISTANCE (Feet-Inches)		STRAP LENGTH (Feet)	HANDLE LENGTH (Inches)	NET WEIGHT (Pounds)
		MIN.	MAX.		MIN.	MAX.			
MODEL 40—CONVERTIBLE MODELS (EQUIPPED WITH TWO HOOKS)									
40-CA	1	1'-7"	9'-2"	2	1'-7"	4'-5"	10'	36"	12.5
40-CB	1	1'-7"	9'-2"	2	1'-7"	4'-5"	10'	38"	12.75
40-CU	1	1'-9"	9'-2"	2	1'-9"	4'-4"	10'	36"	13
40-CUB	1	1'-9"	9'-2"	2	1'-9"	4'-4"	10'	38"	13
40-CHB	1	1'-9"	9'-2"	2	1'-9"	4'-4"	10'	38"	13
MODEL 40—STANDARD MODELS (EQUIPPED WITH THREE HOOKS)									
40-A	1	1'-7"	9'-4"	2	2'-1"	4'-1"	10'	36"	13.25
40-B	1	1'-7"	9'-4"	2	2'-1"	4'-1"	10'	38"	13.5
40-U	1	1'-9"	9'-4"	2	2'-5"	4'-0"	10'	36"	13.75
40-UB	1	1'-9"	9'-4"	2	2'-5"	4'-0"	10'	38"	13.75
40-HB	1	1'-8"	9'-4"	2	2'-3"	4'-0"	10'	38"	13.75

NOTE: All models are equipped with quick-release pulley block. Lug-All grips, straps, and hooks are color coded by capacity.

Specifications are subject to change without notice.

DEDICATED TO PRODUCT INNOVATION **BASED ON CUSTOMER FEEDBACK!**

Lug-All web strap hoists make it easier to work with energized lines. These lightweight hoists have one-hand portability and are simple to use in almost any position. The replaceable stress link is a critical overload warning, allowing the operator to back off the load before injury or damage. That's why experienced linemen choose Lug-All.



STRAP WARNING: The use of the web strap hoist on or around energized lines may result in serious injury or death.

Winch hoists with hot-stick rings eliminate direct contact with hoists. Six one-inch diameter rings on the hooks, handle, and pawl shafts allow the lineman to position the hoist using approved hot sticks. The strap and fiberglass handle are intended to provide an extra measure of safety when working around energized lines. However, the Lug-All web strap hoists are not insulating live-line tools. When the strap is clean and dry, it may have dielectric properties typical of nylon or polyester fibers. However, when the strap becomes wet and/or dirty, it loses these dielectric properties. Use appropriate insulating hot sticks in series with the web strap hoist to achieve proper working distance per OSHA Regulation Subpart V, 1926.950 or company work practices. When the handle swings closer to an energized conductor than OSHA working distances or company work practices permit, use rubber gloves rated for appropriate voltage.

TO AVOID PERSONAL INJURY OR EQUIPMENT DAMAGE:

- Do not use if web strap is twisted, kinked, frayed, or damaged.
- Do not use to lift people or loads over people.
- Do not leave an unattended load suspended in the air.
- Do not lengthen or make any substitution for the Lug-All reversible handle.
- Do not remove or obscure warning labels.
- Do not use hoist as a load binder.
- Do not snag or pull the strap over edges because serious weakening may result.
- Do not use a Lug-All hoist as a tow line.
- Close latches on hook before using.
- Use only genuine Lug-All brand replacement parts.



LUG-ALL®

For inquiries, call us toll free at:
877-658-4255

650 Lincoln Road
Birdsboro, PA 19508

Local: 610-286-9884

Fax: 610-286-9661

Web: Lug-All.com

Email: sales@Lug-All.com

